

DIN 338/N, AUTOCENTRANTE, DESTRA, CON GRANDE RESISTENZA TERMICA



Scatola

**HSS
CO 5%**



135°




HV=800-900



~8xD



Rettificato

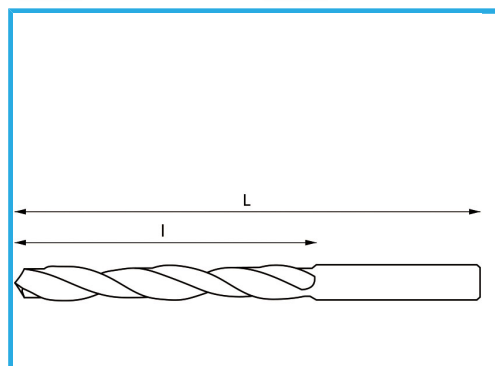

ø	Lunghezza totale	Lunghezza elica
1 mm	34 mm	12 mm
1,25 mm	38 mm	16 mm
1,50 mm	40 mm	18 mm
1,75 mm	46 mm	22 mm
2 mm	49 mm	24 mm
2,25 mm	53 mm	27 mm
2,50 mm	57 mm	30 mm
2.75 mm	61 mm	33 mm
3 mm	61 mm	33 mm
3,25 mm	69 mm	39 mm
3,50 mm	70 mm	39 mm
3,75 mm	70 mm	39 mm
4 mm	75 mm	43 mm
4,25 mm	75 mm	43 mm
4,50 mm	80 mm	47 mm
4,75 mm	80 mm	47 mm
5 mm	86 mm	52 mm
5,25 mm	86 mm	52 mm
5,50 mm	93 mm	57 mm
5,75 mm	93 mm	57 mm

6 mm	93 mm	57 mm
6,25 mm	101 mm	63 mm
6,50 mm	101 mm	63 mm
6,75 mm	109 mm	69 mm
7 mm	109 mm	69 mm
7,25 mm	109 mm	69 mm
7,50 mm	109 mm	69 mm
7,75 mm	117 mm	75 mm
8 mm	117 mm	75 mm
8,25 mm	117 mm	75 mm
8,50 mm	117 mm	75 mm
8,75 mm	125 mm	81 mm
9 mm	125 mm	81 mm
9,25 mm	125 mm	81 mm
9,50 mm	125 mm	81 mm
9,75 mm	133 mm	87 mm
10 mm	133 mm	87 mm
10,25 mm	133 mm	87 mm
10,50 mm	133 mm	87 mm
10,75 mm	142 mm	94 mm
11 mm	142 mm	94 mm
12 mm	151 mm	101 mm
13 mm	151 mm	101 mm